


FCVS2000 Series AC/AC Frequency Converter



Pure sinewave

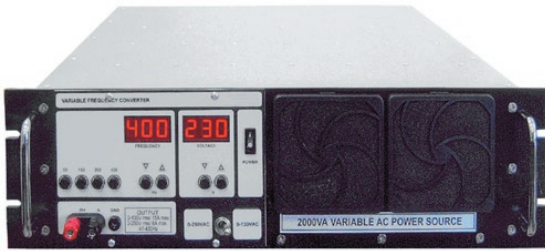

Digital display



Variable output (VAC / Hz)



High frequency technology



Light weight, compact size



Full electronic protection

Applications

- Test Facilities
- Electric Utilities and Substations
- Telecom Power Plants
- Manufacturing Locations
- Steel Mills
- Military Applications (COTS)
- Industrial Controls
- OEM Applications
- Solar / Alternative Power Systems
- Fuel Cells

AC/AC Converters

FCVS2000 Variable AC Power

Description

The FCVS2000 Series is a variable AC power source with an adjustable output of 0 ... 132Vrms (maximum current 15Arms) and 0...264Vrms (maximum current 7.5Arms).

The unit uses PWM technology to generate a 2000VA sine-wave output with a total harmonic distortion less than 5% at full load.

The input is power factor corrected.

The FCVS2000 Series AC power source is suitable for a diverse range of industrial, engineering and academic or laboratory applications.

It can also be used as an AC frequency converter.

The unit is fan cooled and features full electronic protection, high efficiency and low output noise.

The use of components with established reliability results in a high demonstrated MTBF.

The FCVS2000 is manufactured at our plant under strict quality control.

Customized versions are also available.

Features

- Variable output voltage & frequency
- Compact size
- Sinusoidal wave shape
- Digital meters for voltage & frequency
- Isolated, floating output
- 2000VA output power
- Full electronic protection
- High reliability
- Professional quality
- Field-proven design topology

Specifications (Specifications Subject to Change Without Notice)

Input Voltage	Universal 95 ... 264Vac 47 - 410Hz Input current 26A rms max.
Power Factor	Min. 0.97 at full load for the entire input range. Meets EN61000-3-2
Input Protection	Inrush current limiting Varistors Internal safety fuse Lower voltage than specified input min. will not damage unit
Isolation	2250VDC input to chassis, 2250 VDC input to output 8mm spacing, 2250VDC output to chassis
Standards	Designed to meet C22.2 No. 107.1 - 01, UL 458 and EN60950
EMI	EN 55022 Class A as a minimum
Output Voltage	0...132Vrms range; max current 15Arms 0...264Vrms range; max current 7.5Arms
Output frequency	40...440Hz in one band 1Hz step 50, 100, 200, 400Hz 'hot' push buttons
Frequency Stability	±0.1%
Wave Form	Sinusoidal
Total Harmonic Distortion	Less than 5% at full load
Line / Load Regulation	Maximum ± 5% of Vout max. from no load to full load
Load Crest Factor	Maximum 3.0 at 90% load
Output Noise	High frequency ripple is better than 500mVrms (20MHz BW)
Output Overload Protection	Current limiting with short circuit protection Thermal shutdown with automatic recovery in case of insufficient cooling Hiccup at approx. 120% of output max. current
Output Overvoltage Protection	140Vac in low range and 280Vac in high range by internal supply voltage limiting
Efficiency	Typically 80% at full load
Operating Temperature Range	0°C to +50°C for full specification without derating derating linearly 2.5% per °C rise above +50°C to +70°C max. Extended temperature range available
Temperature Drift	0.05% per °C over operating temperature range
Cooling	Built-in fans draw air into the unit
Environmental Protection	Basic ruggedizing Full ruggedizing and conformal coating as option
Humidity	5 - 95% non-condensing
MTBF	Min. 95,000 hours at 45°C Demonstrated MTBF is significantly higher Fan excluded
Indicators	Digital meters for output voltage and frequency
Control Input	Switch ON/OFF Frequency Up/down buttons Frequency Pre Select buttons Voltage Up/down buttons Remote shutdown as option
Alarm Output	None
Package / Dimensions	3U x 19" x 18" enclosed case
Weight	14kg
Connections	Input: terminal block Output: binding posts on front panel AC receptacle on rear panel optional
RoHS Compliance	Fully compliant
Warranty	2 years

Available from:



RIPEnergy®

The power conversion company



RIPEnergy AG
Wägitalstrasse 24
CH-8854 Siebnen
Switzerland

Ph +41-(0)43-818 53 85
Fax +41-(0)43-818 53 87
www.ripenergy.ch