

# VTC1015i Series DC/DC Voltage Converter



(Shown with Optional Digital Meter)

A product of:



## Benefits

- Ultra-Quiet
- Power sensitive electronics without interference
- Rugged & Reliable
- Ensure years of safe and trouble free operation

## Applications

- Telecom Power Plants
- Marine & other rugged environments
- Electric Utilities and Substations
- Base Station Power (Radio & Telecommunications)
- Industrial Controls (OEM Applications)
- Solar / Alternative Power Systems
- Emergency Power Backup (UPS)

## DC/DC Converters

### VTC1015i 12-24 (isolated)

#### Description

The model VTC1015 12-24 Voltage Converter supplies 24VDC from a 12VDC power source.

All new Current Mode switching design offers increased power and reliability in a compact package. Extra input and output filtering reduce EMI to extremely low levels. Reliability features include an input fuse, thermal shutdown, current limiting, reverse battery hookup protection and output short circuit shutdown with automatic recovery.


The output voltage is easily adjusted 0.5 volts above or below the standard output voltage. Devices connected to the converter are protected by an output overvoltage crowbar circuit.

Optional features include a Remote Control, a 19" Rack Mount version, and/or a Digital Volt Ammeter to allow monitoring of output current and output voltage.

#### Features

- Fully Isolated Design
- Adjustable output voltage
- Audible & visual indicators for constant current, low input voltage, low output voltage & over-temperature
- Over-temperature shutdown
- Short circuit protection
- Output overvoltage crowbar
- Cycle by cycle current limiting
- Reverse input protection
- Transient Voltage Suppression
- Ultra-quiet low EMI operation
- Dry contact output fail relay
- Thermostatically controlled fan
- Remote control option
- Digital Volt/Ammeter option
- Wide-Temperature operation Available
- Conformal Coating and/or Harsh Environment Ruggedization Available
- 19" Rackmount Option (VTC1015iR)
- 3 year parts and labour warranty

## Mechanical Diagram

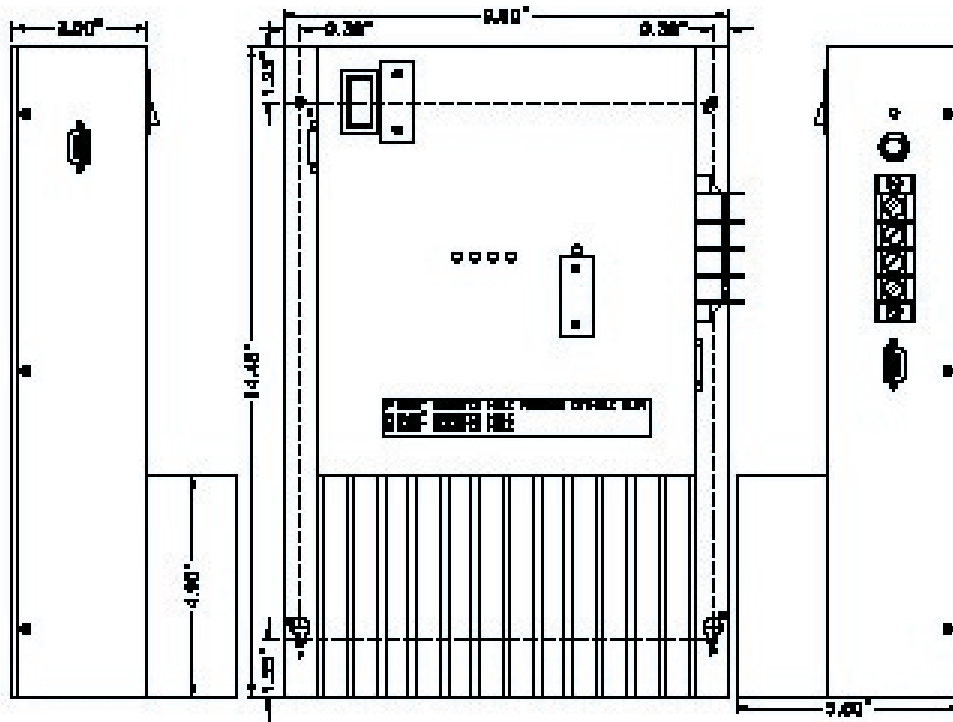

## Specifications ( Specifications Subject to Change Without Notice )

### Electrical (Input)

Nominal (ip)	12
Actual (Vdc)	10-16
Input Amps (max)	62
Noise on Input	< 50 mV

### Environmental Specifications

Operating Temp. Range	-25° to +40°C @ maximum output Derate Linearly 2.5% per °C from 40°C (Optional -40°C extra wide temp. operation avail.)
Humidity	0 - 95% Relative Humidity (non-condensing) with optional conformal coating
Audible Noise	NONE Ødb @ 3 ft (34.5 dB when fan operating)
Typical Service Life	> 10 yrs. (87,600 hrs)
Isolation	Input-Case & Input-Output 1500VDC Output-Case 500VDC


### Electrical (Output)

Output Volts (DC)	24
Output Amps	30 cont.
Output Adjustment	± 0.5
Output Crowbar	32.0 ± 1.0V
Switching Frequency	60 ± 2.0 KHz
Idle Power	< 10 Watts
Output Ripple & Noise	< 50 mV
Transient Response	< 2V for 50% Surge (Output Amps/2)
Regulation (Line & Load)	< +/- 0.5%
Duty Cycle	Peak 20% for 10 min maximum Continuous 100% for 24 hours per day
Efficiency	> 85% @ Maximum Output

### Mechanical Specifications

Length	14.5 in / 36.8 cm
Width	9.9 in / 25.1 cm
Height	5.5 in / 14.0 cm
Material	Marine Grade Aluminium
Finish	Black Anodize / Powder Epoxy Coat
Fastenings	All 18-8 Stainless Steel
Weight	12.0 lb / 5.5 kg
Connections	Four contact output terminals
Warranty	3 years
Safety	Approval to cETLus standards pending

Available from:

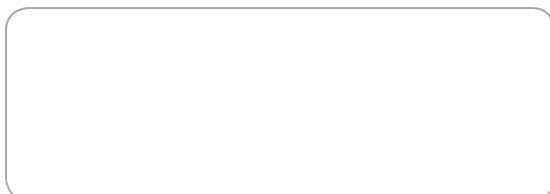

# RIPEnergy®

The power conversion company

RIPEnergy AG  
Talstrasse 2  
CH-8702 Zollikon  
Switzerland

Ph +41-(0)43-818 53 85  
Fax +41-(0)43-818 53 87  
www.ripenergy.ch