

IVS1000 Series DC/AC Pure-Sinewave Inverter



A product of:



Benefits

- Ultra-Quiet
- Power sensitive electronics without interference
- Rugged & Reliable
- Ensure years of safe and trouble free operation

Applications

- Marine / Automotive / RV
- Electric Utilities and Substations
- Telecom Power Plants
- Manufacturing Locations
- Steel Mills
- Military Applications (COTS)
- Industrial Controls
- OEM Applications
- Solar / Alternative Power Systems
- Fuel Cells

DC/AC Inverters

IVS1000 Series Pure-Sinewave

Description

The IVS1000 Series is a highly compact 1000VA DC/AC pure sinewave inverter that uses established design techniques to ensure high reliability.

Suitable for a wide range of applications, the IVS1000 features full electronic protection, high efficiency and low output noise. The built-in fan provides sufficient airflow for operation without de-rating up to 50°C ambient temperature.

Extended operating temperature (-40°C) is available.

The inverter can be loaded with a fluorescent lamp load up to the full-specified output power.

Features


- Input is filtered to EN 55022 Class B
- Very low input ripple current
- Compact size, light weight
- Sinusoidal wave shape
- Multiple input and output voltages available
- 1000VA of output power
- Full electronic protection
- Field-proven design topology

Specifications (Specifications Subject to Change Without Notice)

Specifications

Input Voltage	24VDC, 36VDC, 48VDC, 125VDC, 250VDC +/-20% are standard Other inputs available, please consult factory
Input Protection	Thermal fuse, Inrush current limiting, Reverse polarity protection
Isolation	Input to chassis 500VDC for < 60V input, 1500VDC for > 60V input Input to output 2250VDC, Output to chassis 2250VDC
Output Voltage	115VAC / 50Hz or 60Hz or 400Hz / 8.7A or 230VAC / 50Hz or 60Hz or 400Hz / 4.34A with grounded neutral. Isolated floating output optional (Consult factory for other voltages and frequencies)
Wave Form	Sinusoidal
Total Harmonic Distortion	Less than 5% at full load
Efficiency	Min 78% at full load
Line Regulation	Maximum 0.5%
Load Regulation	Maximum \pm 6% from 10% load to full load (\pm 1% option available)
Output Protection	Current limiting with short circuit protection, thermal shutdown with automatic recovery in case of continuous overload or insufficient airflow
EMI	Meets EN 55022 Class B
Load Crest Factor	Maximum 3.0 at 90% load
Operating Temperature Range	0° C to +50° C, Derating Linearly 2.5% per ° C from 50° C
Humidity	5 - 95% non-condensing
Temperature Drift	0.05% per ° C over operating temperature range
Dimensions	13.5 x 19.1 x 39.7 cm / 5.3" x 7.5" x 15.5" enclosed case (H x W x L)
Connections	Input: Compression-type terminal Output: Standard AC receptacle
Weight	13 pounds (5.9 Kg)
Safety	Compliance to C22.2 No. 107.1 - 01 and UL 458
Options	Output Fail Alarm (Form C) Remote Inhibit: By closing external contacts on the inhibit terminals
Warranty	2 years

Available from:

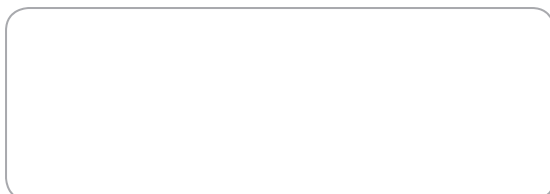

RIPEnergy®

The power conversion company

RIPEnergy AG
Talstrasse 2
CH-8702 Zollikon
Switzerland

Ph +41-(0)43-818 53 85
Fax +41-(0)43-818 53 87
www.ripenergy.ch