

PSP319 Series AC Power Supply



Benefits

- Electronic power factor correction (PFC)
- Ultra-Quiet
- Power sensitive electronics without interference
- Rugged & Reliable
- Ensure years of safe and trouble free operation

Applications

- Marine / Automotive / RV
- Electric Utilities and Substations
- Telecom Power Plants
- Manufacturing Locations
- Steel Mills
- Military Applications (COTS)
- Industrial Controls
- OEM Applications
- Solar / Alternative Power Systems
- Fuel Cells

Power Supplies

PSP319 Series 450W

Description

The PSP319 Series AC/DC power supply with factor corrected input delivers up to 450W output power. This fieldproven design has a well documented record of reliable operation in very demanding applications. Its rugged construction ensures that it can withstand high levels of shock and vibration. The PSP319 features low component count and high efficiency. The use of professional quality components and rigorous quality control results in an MTBF exceeding 150,000 hours at 45°C.


Features

- Compact size
- Rugged, industrial quality
- Single regulated and adjustable output
- Convection/conduction cooling
- 450W output power
- Full electronic protection
- Field-proven design
- N+1 redundancy available
- 1 year parts and labour warranty

Specifications (Specifications Subject to Change Without Notice)

| | |
|--------------------------------------|---|
| Input Voltage range | Universal 90 ... 264VAC, 47 - 63Hz |
| Input Protection | Inrush current limiting Varistors Internal safety fuse Lower voltage than the specified minimum input will not damage the unit |
| Power Factor | Min. 0.97 at full load for the entire input range. Meets EN61000-3-2 |
| Isolation | 2250VDC input to chassis 4300VDC input to output 8mm spacing 500VDC output to chassis |
| Switching Frequency | 50-150KHz Boost section (dependent on the load) 55 KHz +/-3KHz for the DC/DC (half-bridge) section |
| Hold Up Time | Minimum 10ms at full load for 5% drop of output voltage at nominal input |
| Output Voltages | 12VDC/37.5A, 24VDC/18.7A, 48VDC/9.4A, 54VDC/8.3A, 125V/3.6A are standard Consult factory for other voltages |
| Redundancy Diode | Optional Not available for 12V version |
| Line / Load Regulation | ± 1% combined from no load to full load |
| Dynamic Response | Max 5% voltage deviation for 10% to 50% load step, with better than 1msec recovery time |
| Output Overvoltage Protection | Second regulator loop. Typically set at 120% of nominal output voltage |
| Output Overload Protection | Rectangular current limiting with short-circuit protection (no hiccup) Thermal shutdown in case of insufficient cooling (self resetting) |
| Efficiency | Typical 80% at full load (Output voltage dependent) |
| EMI | EN 55022 Class A as minimum |
| Output Ripple/Noise | Less than 1% of output voltage peak to peak or 0.2% RMS of the output voltage (20MHZ BW) |
| Operating Temperature | 0 to 50°C for full specification Extended temperature range available |
| Temperature Drift | 0.03% per °C over operating temperature range |
| Cooling | Conduction to customer heatsink or chassis and natural convection |
| Environmental Protection | Basic ruggedizing, Full ruggedizing and conformal coating on request |
| Humidity | 5 – 95% non-condensing |
| MTBF | 150'000 at 45°C Demonstrated MTBF is significantly higher |
| Indicators | None |
| Alarm Output | None on standard version Available as option |
| Connections | 12 pole barrier type terminal block with 3/8" spacing |
| Dimensions | F4: (5.1x 2.63" x 13.82") 12.9x6.7x 35.1cm including mounting flanges and terminals |
| Weight | 2.0 kg |
| Standards | Designed to meet EN60950 and corresponding US and CSA standards |
| RoHS Compliance | According to requirements |
| Warranty | 1 year |

Available from:

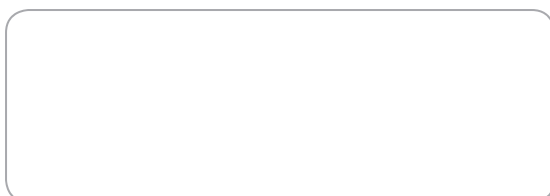

RIPEnergy®

The power conversion company

RIPEnergy AG
Talstrasse 2
CH-8702 Zollikon
Switzerland

Ph +41-(0)43-818 53 85
Fax +41-(0)43-818 53 87
www.ripenergy.ch