

VTC610i Series DC/DC Voltage Converter



A product of:



Benefits

- Ultra-Quiet
- Convection cooled, no noisy fan
- Power sensitive electronics without interference
- Rugged & Reliable
- Ensure years of safe and trouble free operation

Applications

- Marine & other rugged environments
- Electric Utilities and Substations
- Manufacturing Plants
- Steel Mills
- Military Applications (COTS)
- Industrial Controls
- OEM Applications
- Fuel Cells
- Solar / Alternative Power Systems
- Electric Vehicles

DC/DC Converters

VTC610i Series (isolated)

Description

The model VTC610i Voltage Converter supplies 12V, 24V or 48 VDC from a 110V or 250VDC power source. Other input/output voltages are also available by special order.

The all-new Current Mode switching design offers increased power and reliability in a compact package. Extra input and output filtering reduce EMI to extremely low levels. Reliability features include an input fuse, thermal shutdown, current limiting and short circuit shutdown with automatic recovery.


The output voltage is easily adjusted 0.5 volts above or below the standard output voltage to accommodate special requirements.

Optional features include a Remote Control, a Digital Volt Ammeter, Battery Charging and/or a 19" Rack Mount version.

Features

- Fully Isolated Design
- Adjustable output voltage
- Audible & visual indicators for constant current, low input voltage, low output voltage & over-temperature
- Over-temperature shutdown
- Short circuit protection
- Output overvoltage crowbar
- Cycle by cycle current limiting
- Reverse input protection
- Transient Voltage Suppression
- Ultra-quiet low EMI operation
- Dry contact output fail relay
- Custom input voltages from 65 to 360 VDC
- Custom output voltages from 12 to 55 VDC
- Remote control option
- Digital Volt/Ammeter option
- Wide-Temperature operation Available
- Conformal Coating and/or Harsh Environment Ruggedization Available
- 19" Rackmount Option (VTC610iR)

Mechanical Diagram

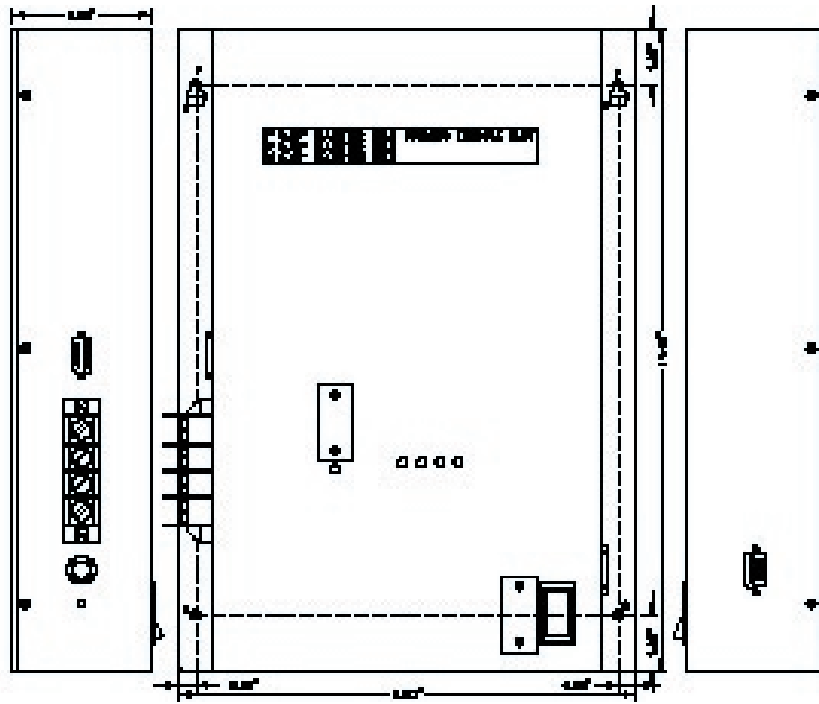

Specifications (Specifications Subject to Change Without Notice)

Electrical (Input)

Nominal (ip)	110	250
Actual (Vdc)	100-140	230-280
Input Amps (max)	8.0	3.5
Input Fuse (MDA)	10	4
Noise on Input	< 50 mV	

Environmental Specifications

Operating Temp. Range	-25° to +40°C @ maximum output Derate Linearly 2.5% per °C from 40°C (Optional -40°C extra wide temp. operation avail.)
Humidity	0 - 95% Relative Humidity (non-condensing) with optional conformal coating
Audible Noise	NONE Ødb @ 3 ft
Typical Service Life	> 10 yrs. (87,600 hrs)
Isolation	Input-Case & Input-Output 1500VDC Output-Case 500VDC


Electrical (Output)

Output Nominal (op)	12	24	48
Output Volts (DC)	13.6 ± 0.05	27.2 ± 0.05	54.4 ± 0.05
Output Amps	40 cont. / 45 peak	20 cont. / 25 peak	10 cont. / 13.5 peak
Output Crowbar	16.0 ± 0.5V	32.0 ± 1.0V	63.9 ± 2.0V
Output Adjustment	± 0.5		
Output Ripple & Noise	< 50 mV		
Transient Response	< 2V for 50% Surge		
Regulation (Line & Load)	< +/- 0.5%		
Duty Cycle	Peak 20% for 10 min max Continuous 100% for 24 hours per day		
Efficiency	> 85% @ Maximum Output		

Mechanical Specifications

Length	14.5 in / 36.8 cm
Width	10.2 in / 25.9 cm
Height	3.0 in / 7.6 cm
Clearance	1 inch (2.5 cm) all around
Material	Marine Grade Aluminium
Finish	Black Anodize / Powder Epoxy Coat
Fastenings	All 18-8 Stainless Steel
Weight	7.5 lb / 3.4 kg
Connections	Four contact output terminals
Warranty	3 years
Safety	UL458 & CSA22.2.107.1 Pending

Available from:

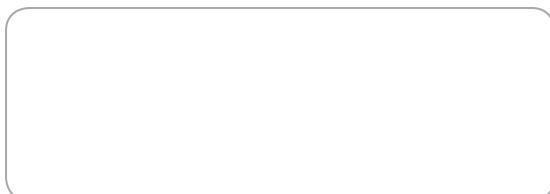

RIPEnergy

The power conversion company

RIPEnergy AG
Wägitalstrasse 24
CH-8854 Siebnen
Switzerland

Ph +41-(0)43-818 53 85
Fax +41-(0)43-818 53 87
www.ripenergy.ch